



KP - Operator interface

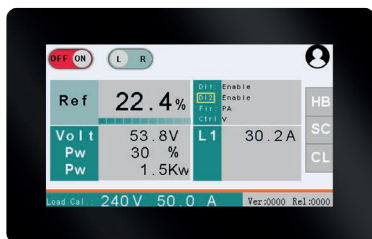


KP is designed to be mounted on front cabinet and to be connected with most of CD Automation's thyristor units via RS485. On front unit is possible to read parameters, power, current and alarms. In addition are available Local/Remote, up and down and function command.

Applications examples


REVO C, REVO PC, REVO PN

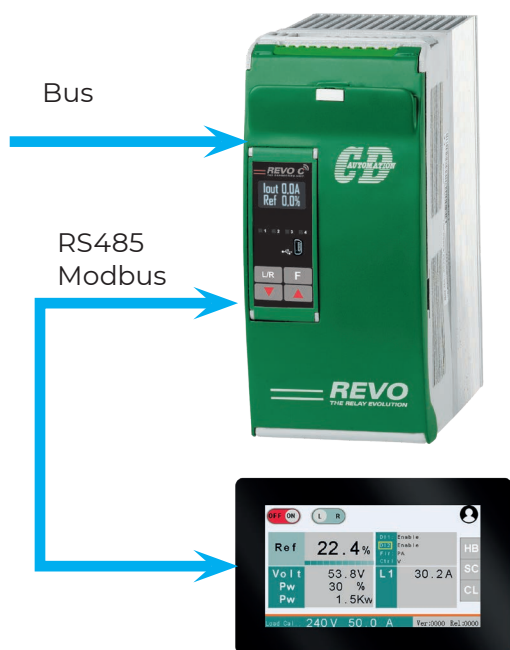

REVO C, REVEX, REVEX PA

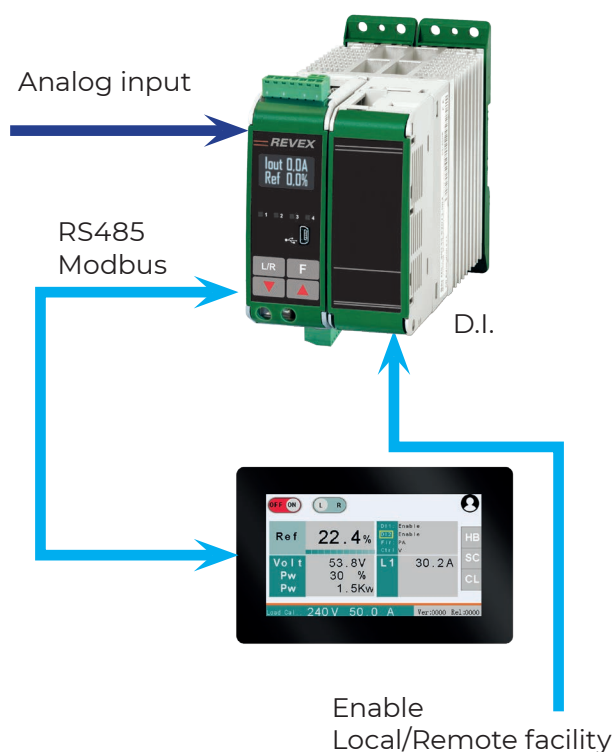


REVO PB, REVO RT, REVO TH

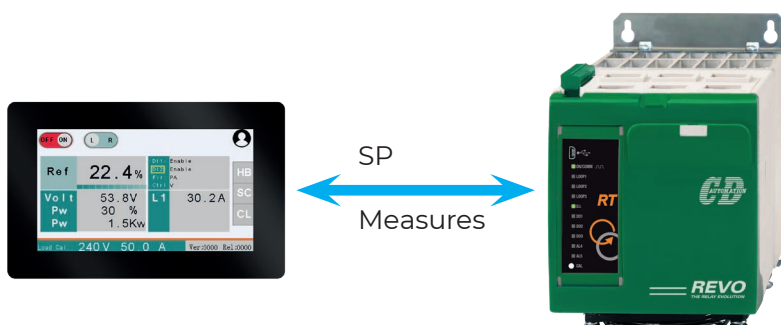

Dimensions: front: width 138 mm - height 97 mm - frame thickness 5 mm
 perforation: width 127 mm - height 85 mm - depth rear 15 mm




- G. GND (0V)
- B. RS485 - (B)
- A. RS485 + (A)
- T. Not used
- R. Not used
- V. Power Supply 24Vdc

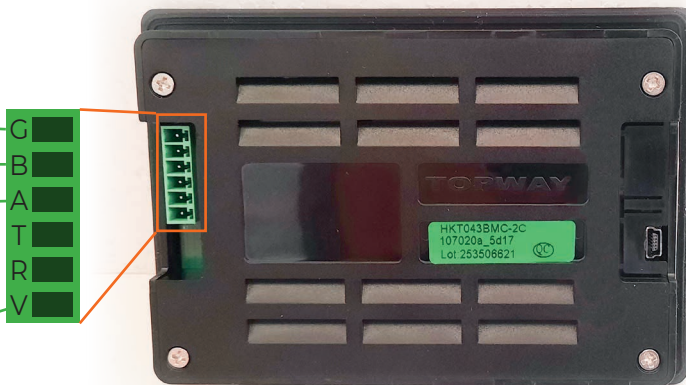

- Power Supply 24Vdc (6.0-26.0V), 80mA
- RS485 MODBUS RTU Master

REVO PB, REVO RT, REVO TH

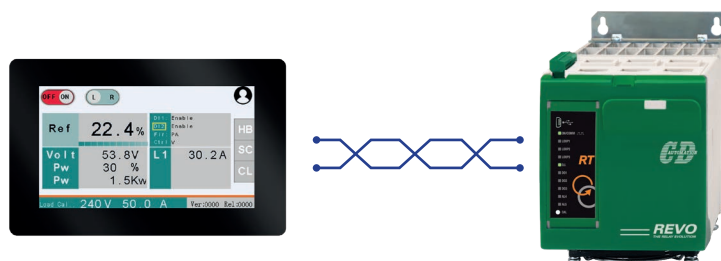

KP - Operator interface

Order Code

| Order Code | | | | | | | | | | | | | | | | | |
|------------|---|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | | 5 | 6 | | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| K | P | - | - | - | - | - | - | - | - | - | - | - | - | 0 | 0 | 0 | 0 |

| Version | 3 | 4 |
|---|------|---|
| description | code | |
| Operative Display for REVO C and REVEX Series | R | C |
| Operative Display for REVO PN | P | N |
| Operative Display for REVO RT | R | T |

| Screen size | 5 | 6 |
|-----------------|------|---|
| description | code | |
| 4.3" Horizontal | H | 4 |
| 4.3" Vertical | V | 4 |

| Communication | 7 | 8 | 9 | 10 |
|---------------|------|---|---|----|
| description | code | | | |
| MODBUS RTU | M | 0 | 0 | 0 |

| Approvals | 11 | 12 |
|-------------|------|----|
| description | code | |
| CE | 0 | 0 |